



CompM



Klassifizierung nach DIN EN ISO 16890

classification acc. to DIN EN ISO 16890

Kopfraumen in 20/25 mm

header in 20/25 mm

Verfügbar in 100 mm und 150 mm Tiefe

available in depths 100 mm and 150 mm

Vollständig veraschbar


fully incinerable

selection table			
Item	component		code definition
A	frame type	Comp	plastic
B	frame material	M	Header-frame
C	pleat pack	80	depth (mm)
D	filter class	6,7,8,9,13	acc. To DIN EN 779/EN 1822
E	gasket type	G, N	G = one piece foamed N = flat profile
F	gasket position	0 1 2 3	no gasket clean air side dirty air side both sides
G	faceguard position	F0 F1 F2 F3	no faceguard clean air side dirty air side both sides
H	specifics		upon request
I	dimensions	H x W x D	mm

sizes in mm			airflow @ 2,7 m/s
H	W	D	
287	592	100	1650
592	592	100	3400
287	592	150	1650
592	592	150	3400

A	B	C	D	E	F	G	H	I
Comp	M	80	7	G	0	F0	X0	...x...x...mm

initial resistance @ nominal airflow		
filter class	depth [mm] 80	efficiency
	[Pa]	
M6	130	ePM 10 65%
F7	150	ePM 2,5 60 %
F8	150	ePM 1 65%
F9	185	ePM 1 85%

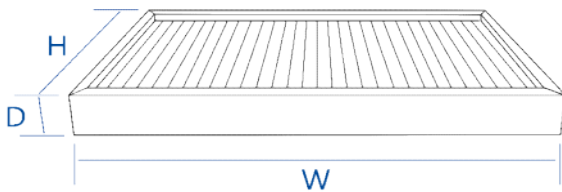

temperature-limit 70°C

non standard options or dimensions upon request

