

## PAK-MTL



**Rahmen in 150 mm und 292 mm Tiefe**

in 150 mm and 292 mm depth

**Filterklassen H13 nach DIN EN 1822**

filter class H13 acc. to DIN EN 1822

**Weitere Filterklassen verfügbar**

other filter classes available

**Ausführung in Edelstahl möglich**


stainless steel execution available

selection table			
Item	component		code definition
A	frame type	PAK	PAK-Version
B	frame material	MTL	anodized steel
C	pleat pack	120, 180	depth (mm)
D	filter class	H13	to DIN EN 1822
E	gasket type	G, N	G = one piece foamed N = flat profile
F	gasket position	0 1 2 3	no gasket clean air side dirty air side both sides
G	faceguard position	F0 F1 F2 F3	no faceguard clean air side dirty air side both sides
H	specifics		upon request
I	dimensions	H x W x D	mm

sizes in mm			airflow
H	W	D	
305	305	150	500
610	305	150	1000
610	610	150	2000
305	305	292	750
610	305	292	1500
610	610	292	3000

A	B	C	D	E	F	G	H	I
PAK	MTL	180	13	G	1	F0	X0	...X...X... mm

initial resistance @ nominal airflow			
filter class DIN EN 1822	depth (mm)		efficiency
	120 1,5 m/s	180 2,3 m/s	
	[Pa]		
H13	250	290	99,95000%

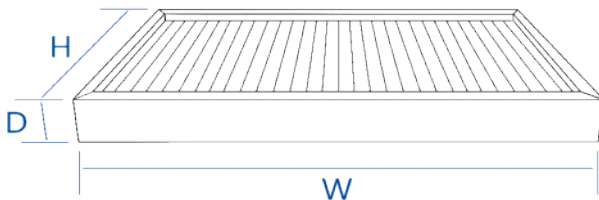

temperature-limit 70°C

non standard options or dimensions upon request

